12-Aug-25

To

M/S. PREMIER 1888 LTD,
CHATTOGRAM,
BANGLADESH.

[Proposal No: 12.Aug.2025/WTT-0954/BAN/NP-RWTP/480K/R0/TCP]

Dear Sir,

WTT International Private Limited (WTT) is pleased to provide **M/s. PREMIER 1888 LTD** with the Techno Commercial Proposal for supply of engineering & materials for **Raw Water Treatment Plant of capacity 480 M^3/Day.** In developing this offer WTT worked with you in an effort to understand your project and business needs. The attached proposal outlines the solutions we feel will best meet these objectives.

We greatly appreciate your consideration of WTT for this project. Our measure of success is how well we deliver solutions that help our client to meet their critical business objectives. We hope to have the opportunity to demonstrate this with your good selves.

Yours Sincerely,

D. Venkatesh
Managing Director

S.NO	DESCRIPTION	PREPARED	APPROVED
1.	Techno commercial Proposal for – "Raw water Treatment Plant of capacity 480 M^3/Day".	CS - GET AR - AGM	DV - MD

CONFIDENTIALITY

All details, specifications, drawings, images, and all other information submitted by us are only intended to the person/organization to which it is addressed and contains proprietary, confidential and or privileged material. Any review, retransmission, dissemination, or other use of, or of taking action in reliance upon this information by person or entities other than the intended recipient is prohibited. All or part information contained in the document is solely intended to the person or entity addresses and sharing this document in part or in whole is prohibited.

WE FEEL DELIGHTED TO PRESENT OUR PATENTED SYSTEMS

Award For Excellence in Water Management

CII (Confederation of Indian Industry) *awarded*
WTT International *with the prestigious*

"Excellence in Water Management Award"

recognizing the advanced water treatment technologies
innovated by ***WTT International***
As a part of Industrial Water / Waste Management competition 2023

CONTENT

1. Technical and Engineering Details 6
1.1. INFLUENT FLOW DATA 6
1.2. INFLUENT QUALITY 6
2. Design Basis 7
2.1. DESIGN SYSTEM CHOSEN 7
2.2. EXPECTED TREATED WATER QUALITY 7
3. Equipment Details for Proposed Systems 9
3.1. GREEN SAND FILTER 9
3.2. SOFTENER FILTER 9
4. Equipment Scope of Supply – BY WTT 9
5. Scope of Supply & Installation - BY CLIENT 11
6. Typical Equipment Vendor List 13
7. PRICING DETAIL 14
8. Happy Customers 15
9. Channel Partners 15
10. Process Description Video 15
11. Commercial Terms and Conditions 16
11.1. TAXES 16
11.2. FREIGHT 16
11.3. INVOICING AND PAYMENT TERMS 16
11.4. EQUIPMENT SHIPMENT 16
11.5. FORCE MAJEURE 17
11.6. PRICING NOTES 17
12. Client Scope Of Supply 17
12.1. SAFETY AND ENVIRONMENTAL 17
12.2. JOBSITE AND INSTALLATION REVIEW 18
12.3. START-UP AND COMMISSIONING 19
12.4. FACILITY MANAGEMENT 20
12.5. CONDITIONAL OFFERING 20

13. APPENDIX 21
13.1. APPENDIX A: CLARIFICATIONS 21
13.2. APPENDIX B: ACCEPTANCE 21
13.3. APPENDIX C: WARRANTY 22

1. Technical and Engineering Details

1.1. Influent Flow Data

STREAM	FEED FLOW RATE	UNIT
RWTP INLET	499.4	M^3/DAY

1.2. Influent Quality

S.NO	PARAMETER	UNIT	RWTP INLET
1.	pH	--	6 – 8
2.	BOD *	mg/L	NIL
3.	COD	mg/L	< 50
4.	TDS	mg/L	1100
5.	TSS *	mg/L	NIL
6.	TURBIDITY *	NTU	< 1
7.	IRON	mg/L	7
8.	HARDNESS	mg/L of $CaCO_3$	400
9.	ALKALINITY *	mg/L of $CaCO_3$	600
10.	TEMPERATURE	ºC	30 – 35
11.	OIL & GREASE *	mg/L	NIL
12.	OTHER HEAVY METALS *	mg/L	NIL

*The *Parametrical values have been considered for the purpose of designing the treatment system. Any change in these values will impact design & cost of the RWTP.*

The design solution proposed is based on the values as presented in the table above at **RWTP Inlet.** All concentrations refer to max concentrations to be used for the system's design. **Any change in the actual inlet parameters will have impact on Process Design, Engineering Design, Cost and Performance.**

2. Design Basis

2.1. Design System Chosen

S.NO	SYSTEM/EQUIPMENT	CAPACITY (M^3/DAY)	PURPOSE OF THE SYSTEM/EQUIPMENT PROPOSED
1.	GREEN SAND FILTER	499.4	TO REMOVE IRON FROM THE RAW WATER FOR FUTURE USE
2.	SOFTENER FILTER	489.6	TO REDUCE WATER HARDNESS THROUGH ION EXCHANGE, PREVENTING SCALING IN DOWNSTREAM PROCESSES

NOTE: System capacities mentioned above are based on RWTP influent flow Rate and the Actual capacities may vary.

PROPOSED WATER BALANCE

RAW WATER TREATMENT PLANT OF CAPACITY 480 M³/DAY & 1100 mg/L TDS

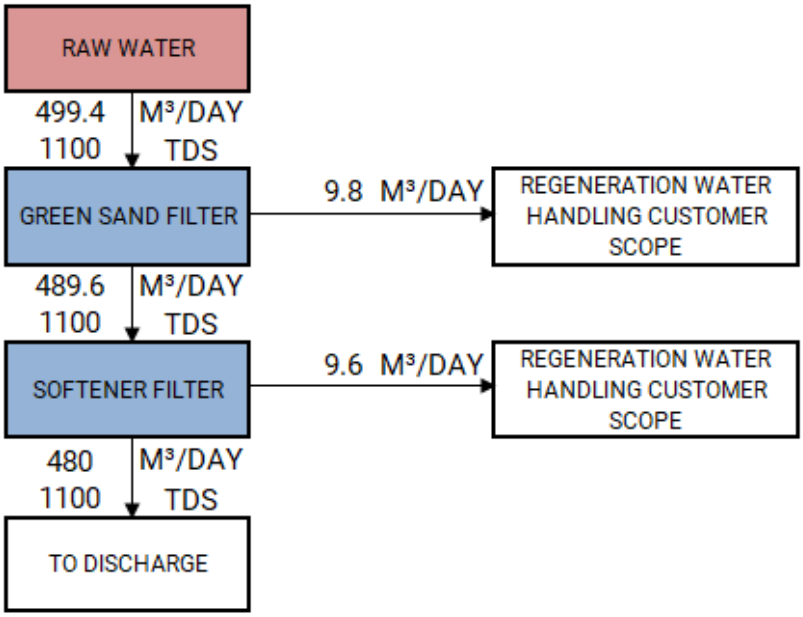

2.2. Expected Treated Water Quality

The following performance parameters are expected under standard operating conditions after equipment start-up based on the data and assumptions listed above and in Appendix, Warranties. In case of conflicting numbers, the ones listed under Appendix take precedence:

PARAMETER	UNIT	RWTP INLET	TREATED WATER
pH	--	6 - 8	6 – 8
BOD	mg/L	NIL	NIL
COD	mg/L	< 50	SAME AS INLET
TDS	mg/L	1100	SAME AS INLET
TSS	mg/L	NIL	NIL
IRON	mg/L	7	< 1 *
HARDNESS	mg/L of $CaCO_3$	400	< 10 *
ALKALINITY	mg/L of $CaCO_3$	600	SAME AS INLET
TEMPERATURE	°C	30 – 35	30 – 35
OIL & GREASE	mg/L	NIL	NIL
OTHER HEAVY METALS	mg/L	NIL	NIL

BDL – below detectable limit, NA – not applicable; Values are system generated which may vary with variation in inlet & on operational basis

* Depends on the **service velocity through filter vessels & Retention time of water within the filters.**

Notes:

- All influent quality parameters are based on daily average values of a minimum of four (4) Nos. of hourly composite samples collected at regular intervals over a day, with testing performed to applicable industry-approved standards.
- The treated water parameters could take 6 months for attaining specified values as per above table after successful commissioning.
- The above recovery water quality expectation is based on WTT supplying the system and scope Equipment as per the scope of supply table described in section 3 below.

3. Equipment Details for Proposed Systems

3.1. Green Sand Filter

A Green Sand Filter removes iron using green sand filter media. It works through oxidation and periodic regeneration to maintain its Iron removal efficiency. The media is coated with manganese oxide, which acts as an oxidizing agent to convert dissolved iron into solid particles that can be filtered out.

3.2. Softener Filter

A softener filter is used to reduce water hardness by removing calcium and magnesium ions through ion exchange. This is particularly important in applications where scaling in equipment or processes must be prevented. Softener filters improve operational efficiency, protect downstream equipment, and ensure compliance with water quality requirements for reuse or discharge.

4. Equipment Scope of Supply – By WTT

PLANT EQUIPMENT LIST			
A	**GREEN SAND FILTER**		**499.4 M^3/DAY**
S.NO	**DESCRIPTION**	**SPECIFICATION**	**QUANTITY**
1.	SAND FILTER	FEED PUMP	1W + 1S
		PUMP MOC	CI/CI
		PUMP TYPE	SURFACE MOUNTED
		REGENERATION PUMP	1W + 1S
		PUMP MOC	SS316
		PUMP TYPE	SURFACE MOUNTED
		BLOWER	1W
		TYPE	LOBE
		DOSING PUMP	1W + 1SS
		DOSING PUMPS MOC	PP
		GREEN SAND FILTER VESSEL	1 No.
		VESSEL MOC	MS EPOXY COATED

		FILTER MEDIA	1 LOT
		ELECTROMAGNETIC FLOWMETER	1
		FRONTAL PIPING, VALVES & INSTRUMENTS	1 LOT

B	SOFTENER FILTER		489.6 M^3/DAY
S.NO	**DESCRIPTION**	**SPECIFICATION**	**QUANTITY**
2.	SOFTENER FILTER	FEED PUMP	1W + 1S
		PUMP MOC	CI/CI
		PUMP TYPE	SURFACE MOUNTED
		REGENERATION PUMP	1W + 1S
		PUMP MOC	SS316
		PUMP TYPE	SURFACE MOUNTED
		SOFTENER FILTER VESSEL	1 No.
		VESSEL MOC	FRP
		SOFTENER FILTER MEDIA	1 LOT
		MEDIA TYPE	WEAK ACID CATIONIC RESIN
		ELECTROMAGNETIC FLOWMETER	1 No.
		DOSING PUMP @	2W + 1SS
		DOSING PUMPS MOC	PP

@Dosing pump has been provided for Regeneration using both Acid & Alkali. Based on the Hardness type – either permanent (or) temporary, the regeneration method could be either Acid only (or) Acid followed by Alkali.

NOTE: Proposed Blower is common for the both Green Sand & Softener filter

W – Working; S – Standby; SS – Store Standby

Specification and quantity details mentioned above are preliminary and may be revised to optimize the performance of the system.

OTHER GENERAL ITEMS IN WTT's SCOPE:

- *Piping in SS, UPVC and its associated items*
- *Electrical control panel for proposed system with standard automation*
- *Power cable and control cable within the electrical panel*
- *Power cable and control cable from electrical panel to proposed equipment*
- *General layout & civil detailed drawing for proposed systems*

HIGHLIGHTS

- *Electrical panel supplied by WTT with necessary cooling technologies and easy operative switch for Automatic & Manual operations.*
- ***PC controlled HMI panel** provided with complete automation and acknowledgement & warnings for cleaning necessities based on the operating conditions.*

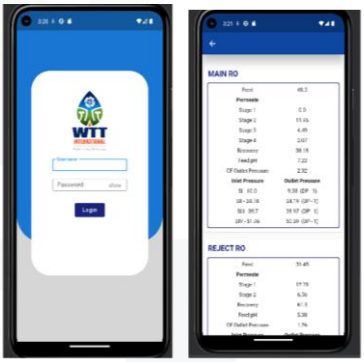

REMOTE DATA MONITORING

5. SCOPE OF SUPPLY & INSTALLATION - BY CLIENT

- Installation of supplied Equipment.
- Transfer of Influent up to proposed Green sand filter System.
- Regeneration water handling from Green Sand Filter and Softener Filter
- All civil related and excavation works, civil structural drawings, underground piping & piping for electrical cabling during civil works.
- Chemical supply and Bulk chemical storage tanks (with fume absorber for acid tanks) for proposed systems based on the available optimum level of chemical procurement

- Raw water supply for whole plant and treated water transfer
- Air conditioning Systems for Panel room & Personal Computers
- Compressed air for pneumatic panel for proposed systems
- Sludge handling and disposal during plant commissioning and operation
- All loading & unloading @ site
- Utilities like Power, Steam, Welding gas, Hot water etc., if Required
- Separate panel, wiring with fans & lights for whole plant & its power supply
- Incomer cable and its connections with WTT supplied electrical panel and stabilized power supply
- All Necessary Earthing & Safety/Protective Earthing shall be provided for individual Instruments, Motor/Pump, Other Electrical Equipment & Panel as per requirement Input power to individual WTT supplied electrical panel
- Pre-Shipment Inspection requested by the local authorities.
- All license fees and / or custom duties.
- Provide Food (3 meals a day), Accommodation with attached sanitary facility (Hotel/Guest House) and Local transport to the team of WTT during all kinds of deputations.
- Installation consumables (such as welding electrodes, cutting disk and others).
- Supply and assembly of all drainage lines for rain water, sewers, etc.
- Any construction approval from local Authorities.
- Supply of any hoisting and/or laying equipment (cranes forklift, etc.) both truck mounted or not.
- Construction of site fencing/railing.
- Protection for all field instruments, local switches, motors, etc.,
- Safety handrails for all tanks, safety items like life buoy rings, eye washer, life-jackets, etc.
- Removal of all residual debris after construction and thorough cleaning of all tanks before plant start-up.
- Any further item not described in our offer.

6. Typical Equipment Vendor List

S.NO	EQUIPMENT	VENDORS
1.	BLOWER	ROBUSCHI
2.	SURFACE MOUNTED PUMP	EBARA / LOWARA
3.	DOSING PUMP	PROMINENT / MILTONROY
4.	ELECTROMAGNETIC FLOWMETER	E+H / SIEMENS
5.	INLINE ANALYZERS	E+H / HACH / PROMINENT
6.	LEVEL FLOAT	FAES
7.	PRESSURE TRANSMITTER	DANFOSS
8.	PRESSURE GAUGE	FORBES MARSHALL
9.	AUTOMATION	BECKHOFF / SIEMENS
10.	ELECTRICAL PANEL	HOFFMAN / RITTAL
11.	ELECTRICAL CABLE	LAPP
12.	GREEN SAND FILTER	**WTT INTERNATIONAL**
13.	SOFTENER FILTER	

The above-mentioned vendors are subjected to change based on the delivery terms for an equivalent vendor without compromising the quality and WTT reserves the right to change the vendor without any prior intimation.

7. PRICING DETAIL

PRICE FOR PROPOSED SYSTEM – RWTP – 480 M^3/DAY (PERMEATE CAPACITY)		
S.NO	**SYSTEM/EQUIPMENT**	**PRICE IN USD**
1.	**GREEN SAND FILTER SYSTEM**	**$ 94,872**
2.	**SOFTENER FILTER SYSTEM**	**$ 108,295**
TOTAL BASE PRICE FOR PROPOSED SYSTEMS		**$ 203,167**

All above mentioned prices given for the proposed systems with complete automation

- Pricing provided herein does not include any duties and taxes
- Pricing provided herein is on **Ex-Works** basis & does not include the insurance charges
- Supervision of erection and commissioning of WTT supplied system shall be extra
- Payment/commercial terms & conditions as per WTT's General Terms & Conditions of sale.
- Price valid for 15 days from the date of proposal due to market volatility.

8. Happy Customers

WELSPUN
JCT LIMITED
SIDDHI Group
NSL TEXTILES
Sharadha TERRY PRODUCTS LTD
BHILWARA LNJ GROUP
KPR MILL LIMITED
Kanchan
TRIDENTGROUP
Vardhmän
BEST
KITEX
Sona
SKT
BIRLA CENTURY
Himatsingka
premier
GANGA Acrowools
NAHAR INDUSTRIAL ENTERPRISES LIMITED
rdl RSL Dyecot Private Lmited
NUMALIGARH REFINERY LIMITED NRL
silk park kanchipuram Ministry of Textile Government of India & Government of Tamilnadu

AND 12 CETPs ACROSS THE COUNTRY

9. Channel Partners

HYDRANAUTICS Nitto Group Company
DUPONT
AsahiKASEI
KOCH MEMBRANE SYSTEMS
xylem Let's Solve Water
GRUNDFOS
ROBUSCHI
Atlas Copco
KAESER COMPRESSORS
Endress+Hauser People for Process Automation
HACH
ABB
SIEMENS
BECKHOFF
RITTAL
OTT GROUP

10. Process Description Video

11. Commercial Terms and Conditions

11.1. TAXES

Taxes and Duties shall be extra as applicable. Pricing provided herein does not include any taxes of destination country.

If Tax Exemption is applicable, customer has to provide a copy to WTT of any applicable tax exemption certificates as issued by an approved taxation authority for the specific project location. Without an approved tax exemption certificate received by WTT all submitted invoices will include applicable tax. However, we reserve the right to revise our price in case of tax exemption.

11.2. FREIGHT

All the Equipment and components foresee **Ex-works** delivery as per I.C.C. Incoterms-2010.

11.3. INVOICING AND PAYMENT TERMS

The pricing quoted in this proposal is based on the following payment terms, in principally agreed.

(1) 30% Advance Payment along with PI.

(2) 70% by irrevocable Letter of Credit payable at sight against Shipment documents.

Equipment shipment is contingent on receipt of earlier milestone payments.

11.4. EQUIPMENT SHIPMENT

Client and WTT will arrange a kick off meeting after contract acceptance to develop firm shipment schedule. This estimated delivery schedule assumes no more than 1 week for Client review of submittal drawings. Any delays in Client approvals or requested changes may result in additional charges and/or a delay to the schedule.

Material supply for the proposed plant in 4 - 5 months is expected. The delivery schedule excludes the months of August & December, the delivery schedule is subject to review and adjustment. Partial shipments are allowed. In case of modifications to the volume of the supply after the emission of the order confirmation, WTT reserves the right to modify the delivery time and the agreed price.

11.5. FORCE MAJEURE

Please be advised that force majeure is applicable to the quotation provided. The unforeseen and uncontrollable events as defined in our terms and conditions, such as natural disasters, wars or pandemics & other events that prevent the parties from fulfilling their contractual commitments have occurred, impacting our ability to honor the terms outlined in this quotation. We will diligently review the situation and promptly communicate any necessary adjustments or potential delays in fulfilling the quoted services or products in compliance with the force majeure provisions outlined in our agreement.

11.6. PRICING NOTES

All prices quoted are in **USD**. Any applicable tax of destination country is not included. Client will pay all applicable Local, State / Provincial, or Federal taxes & Duties. WTT may manufacture and source the Equipment and any part thereof globally in the country or countries of its choosing, provided that the Equipment complies with all of the requirements specified in this Agreement.

The Equipment delivery date, start date, and date of commencement of operations are to be negotiated. Title and risk of loss will transfer upon delivery in accordance with the INCOTERMS 2010. Commercial Terms and Conditions shall be in accordance with WTT's General Terms and Conditions of Sale as included in Appendix.

12. CLIENT SCOPE OF SUPPLY

12.1. SAFETY AND ENVIRONMENTAL

First aid, emergency medical response, eyewash & safety showers in the water treatment area. Chemical spill response, security & fire protection systems as per local codes. Environmental use and discharge permits for all chemicals at Client facility either listed in this document or proposed for use at a later date. Any special permits required for WTT's or Client employees to perform work related to the water treatment system at the facility. All site testing, including soil, ground and surface water, and air emissions, etc. Disposal of all solid & liquid waste from WTT's system including waste materials generated during construction, startup and operation.

Provide appropriate protection of the environment & local community, the health and safety of all workers and visitors at the site and the security of the facility. Provide safety

related equipment & services such as site security, fire systems, lifting equipment and its operation, fall protection, adequate floor grating, ventilation, and safe access to equipment & electrical systems areas.

Equipment and trained support personnel for any confined space entry required during equipment installation/startup/commissioning/servicing. For permit-required confined space entry, a qualified rescue team on stand-by and available to respond within 4 minutes of an emergency.

Client will identify and inform WTT's personnel of any hazards present in the work place that could impact the delivery of WTT's scope of supply and agrees to work with WTT to remove, monitor, and control the hazards to a practical level. Client will provide training to WTT's personnel on all relevant & standard company operating procedures and practices for performing work on site.

12.2. JOBSITE AND INSTALLATION REVIEW

Review of WTT's supplied equipment drawings and specifications. All easements, licenses and permits required by governmental or regulatory authorities in Connection with the supply, erection and operation of the system.

Overall plant design, detail drawings of all termination points where WTT's equipment or Materials tie into equipment or materials supplied by others Stamping, signing or Sealing General drawings as per State, or local regulations or codes. All applicable civil design and works, including any building, site preparation, grading, excavations, foundations and trenches and accessories.

All electrical Labor and supplies leading up to jobsite including fittings, conduit, supports, cable trays, wire and hardware, air-conditioning of panels required to appropriately ground / earth the equipment as required for installation and ongoing operations.

All mechanical Labor and supplies leading up to jobsite including interconnecting piping, heat tracing (if required), fittings, conduit, pipe supports, and hardware as required for installation and ongoing operations. All instrumentation and automatic pneumatic valves including but not limited to; air/sample line tubing, fittings, conduit, supports, isolating valves as required for installation and ongoing operations. Loading, unloading and transportation of

equipment, materials required for WTT to perform duties outlined in WTT's Scope of Supply to the jobsite and/or warehouse.

Client will provide all access structures (scaffolding), mechanical lifting equipment (cranes, forklifts, scissor lifts, etc.), suitable site/shelter for placement of the proposed equipment, either inside appropriate housing, or outdoors.

Precaution: electrical equipment including the PLC may require air-conditioned rooms to prevent overheating of sensitive electronic equipment depending on climatic conditions. Bulk chemical storage and tanks, including secondary containment in accordance with local codes. Client will receive, off-load, log, and store all chemical and materials in accordance with Manufacturer's recommendation that are shipped. Compressed instrument air for pneumatic valves instruments and ejector system Equipment anchor bolts, Laboratory services, operating and maintenance personnel during equipment checkout, start-up and operation. Any on-site painting or touch-up painting of equipment supplied. Disposal of any Preservative.

For erection, WTT will ship the accessories such as pipes, bolts, nuts, screws, cables, valves any other equipment or devices in excess quantities than required. This is in order to avoid shortages during the assembly due to damage or any other cause as it is difficult to procure the accessories locally. It is notified that all the shipped accessories during assembly and the excess accessories after commissioning are always remain the properties of WTT. WTT has the authority to retake the same at any period of time, even before and after commissioning. It is client's responsibility to preserve the above-mentioned items till WTT takes back the same.

12.3. START-UP AND COMMISSIONING

Installation & removal of temporary screens on all process lines Flushing and disinfection of all piping and tanks (including process equipment tanks) and verification of removal of all residual debris from construction. Alignments & required materials for rotating equipment MEG testing of all field motor power wiring (as required). Continuity checks for all electrical field wiring as per Installation Checklist, Hydro-testing of all field installed piping. Supply raw materials, oil/lubricants chemicals and utilities during start-up and operation.

Electrical & Mechanical support labor for commissioning activities, loading of membranes, stacks, modules, etc.

12.4. FACILITY MANAGEMENT

Client will provide such warehouse storage space and facilities, as are available at the site, and are reasonably appropriate to store parts, consumables, tools, etc. in accordance with manufacturer's recommendations. Such warehouse storage space will be a segregated area, secured and protected from adverse climate as may reasonably be required. The storage area shall be facilitated with 24 hours lock & key with security and Client will be responsible for risk of loss of WTT's parts while in storage at the site. Client will maintain WTT's parts stored at the site free & clear of any and all liens of Client and lenders, bondholders, contractors & other creditors of any nature.

Client will afford WTT's personnel free access and egress of the facility for all authorized work. Provide workshop facilities/area with roof and stabilized power supply, as is reasonably appropriate to carry out machining/fabrication works.

Provide adequate illumination and emergency lighting for all areas in which the WTT will be executing the scope of supply. Identify a Client project contact person to be available to WTT's personnel to address any issues related to WTT's execution of WTT's scope of work. Responsible for the equipment for movement of chemical drums, totes, and resins, as is reasonable. Provide all site utilities such as raw water, instrument quality air, potable water and power required for operation of the proposed equipment included in this scope of supply.

12.5. CONDITIONAL OFFERING

Client understands that this order confirmation has been issued based upon the information provided by Client and currently available to, WTT at the time of proposal issuance. Any changes or discrepancies in site conditions (including but not limited to system influent characteristics, changes in Environmental Health and Safety ("EH&S") conditions, and/or newly discovered EH&S concerns), Client financial standing, Client requirements, or any other relevant change, or discrepancy in, the factual basis upon which this proposal was created, may lead to changes in the offering, including but not limited to

changes in pricing, warranties, quoted specifications, or terms and conditions. WTT's offering in this proposal is conditioned upon a full WTT EH&S.

13. APPENDIX

13.1. APPENDIX A: CLARIFICATIONS

- Pump MOC has been considered as per WTT standard practice.
- The Equipment in WTT scope will be procured as per WTT Standard Vendor List.
- WTT has not envisaged third party equipment inspection before dispatch.
- The payments received once could not be processed again for refund.
- WTT has considered instruments as per WTT standard practice
- Painting specifications of WTT supplied equipment is as per standard manufacturer painting specifications.

13.2. APPENDIX B: ACCEPTANCE

To ensure accurate and prompt order entry, product delivery, billing and accounts receivables processing, please ensure your Purchase Order contains the complete Client and order details.

Please communicate your PO through:

E-mail	venkat@wttint.com
Postal Mail: (Indian Office)	WTT INTERNATIONAL PVT. LTD. No. 3, College cross road Avarangadu, Tiruppur, TamilNadu, INDIA – 641602

Bank Account details:

Beneficiary Name : WTT INTERNATIONAL PVT. LTD.,

Bank Name : INDIAN BANK LTD

Branch Name : TIRUPUR MSME BRANCH, TIRUPUR, TAMILNADU.

Account Number OD : 6475173650,

IFSC Code : IDIB000I043

13.3. APPENDIX C: WARRANTY

The mechanical warranty is only applicable to equipment supplied by WTT. The mechanical warranty period on all equipment supplied, unless otherwise noted, is twelve (12) months from the date of installation or fourteen (14) months from equipment shipment, whichever occurs first. WTT's obligation under this warranty is to the repair or replace, of any device or part thereof, which shall prove to have been manufacturing defects.

This warranty excludes the diffuser membranes, electrical items, defects, failures, damages or performance limitations caused in whole or in part by normal wear & tear, power failures, surges, fires, floods, snow, ice, lightning, excessive heat or cold, highly corrosive environments, accidents, actions of third parties, or other events outside of WTT's control. Warranty period for the entire equipment including replaced or repaired parts will be limited to the unexpired portion of the total warranty period. Bought out components are guaranteed only to the extent of guarantees given to us by our suppliers.

WTT assumes no liability for any damage to equipment caused by inadequate storage or handling as per manufacturer's recommendations in supplied technical literature, or by defective or sub-standard workmanship or materials provided by Client or any other third party responsible for handling, storing or installing the equipment. Client undertakes to give immediate notice to WTT if goods or performance appear defective and to provide WTT with reasonable time and opportunity to make inspections and tests. If WTT is not at fault, Client shall pay WTT the costs and expenses of the inspections and tests.

Goods shall not be returned to WTT without WTT's permission. WTT will provide Client with a "Return Goods Authorization" (RGA) number to use for returned goods. All return costs associated with shipping and labor are not included in the mechanical warranty. WTT warrants, subject to the provisions herein after set forth, that after stable operation of the WTT system has been attained and operators have acquired reasonable skills, the Equipment supplied for this project will be capable of producing the results set forth in stage wise parameter table, provided that:

The Equipment is operated and maintained at all times in accordance with the WTT Operations and Maintenance manual, The Equipment is operated within the mixed liquor characteristics defined in Influent quality table of this section, WTT has, until performance of its obligation herein is met, reasonable access to the Equipment and the operational data

relating thereto, Client furnishes adequate and competent operating, supervisory and maintenance staff, and necessary laboratory facilities with test equipment and personnel, Client utilizes the services of WTT until its performance obligations are met, Client supplies all necessary raw materials and services of a quantity and of a quality specified by WTT, An adequate and continuous power supply is available that will enable operation of all required equipment.